

# NPCA110M Audio Enhancing Engine and CODEC

## General Description

The Nuvoton NPCA110M device is a member of Nuvoton's Sound Enhancing family optimized for mobile applications such as tablets, mobile phones and netbooks.

It provides CODEC functionality to support stereo microphone inputs and either dual-stereo DACs or digital outputs, for built-in speakers or a headphone jack.

The NPCA110M integrates Waves® MaxxAudio 3 sound enhancement algorithms. These are proprietary, patented, psychoacoustic algorithms that compensate for the acoustic limitations of small CE devices.

The MaxxAudio 3 algorithms enable reproduction of rich content, with a wide dynamic range and a full frequency range, on a limited audio system. For low-frequency reproduction, MaxxBass® uses a patented psychoacoustic technique to create a perceived low bass, which can be extended up to 1.5 octaves lower than the original. This technique reproduces full and rich sounding bass tones. Power handling is done by MaxxVolume®, which utilizes the power amplifiers and speakers to their full extent yet avoids clipping and distortions.

The MaxxAudio 3 software suite provides additional algorithms that enhance the overall sound quality, such as Maxx3D, which widens the stereo image, and MaxxTreble, for reproducing crystal clear high frequencies. To design a resonance-free audio system, MaxxEQ provides a flexible equalizer with 10 bands.

The Maxx family of devices includes:

- High-performance, 24-bit audio enhancing device pre-programmed with Waves MaxxAudio 3 algorithms
- Optional Audio ADC with stereo microphone support
- Optional Audio DAC
- Digital I/O and other features for high-performance audio systems

## Outstanding Features

- Improves audio quality for low-performance speakers
- System-level BOM savings
- Stereo operation
- I2C controlled
- 24-bit accuracy
- Audio algorithms

—  **MAXXBASS®**

—  **MAXX3D**

—  **MAXXTREBLE**

—  **MAXXEQ**


—  **MAXXVOLUME®**

—  **MAXXLEVELER**

—  **MAXXDIALOG**

- Audio input
  - Up to two I2S or Synchronous Serial Interface (SSI) inputs
  - Up to three stereo analog inputs with microphone support: typical SNR of 90 dB; typical THD of -75 dB
- Audio output
  - Optional generation of bass channel for sub-woofer
  - Up to three I2S or SSI outputs
  - Up to four analog outputs: typical SNR of 96 dB; typical THD of -86 dB
- Several General-Purpose digital signals available to the application (GPIOs)
- Typical operational power target down to 0.05W
- Power-down target of less than 0.3 mW
- 3.3V (I/O, Analog) and 1.8V (Core) operation

## System Block Diagram

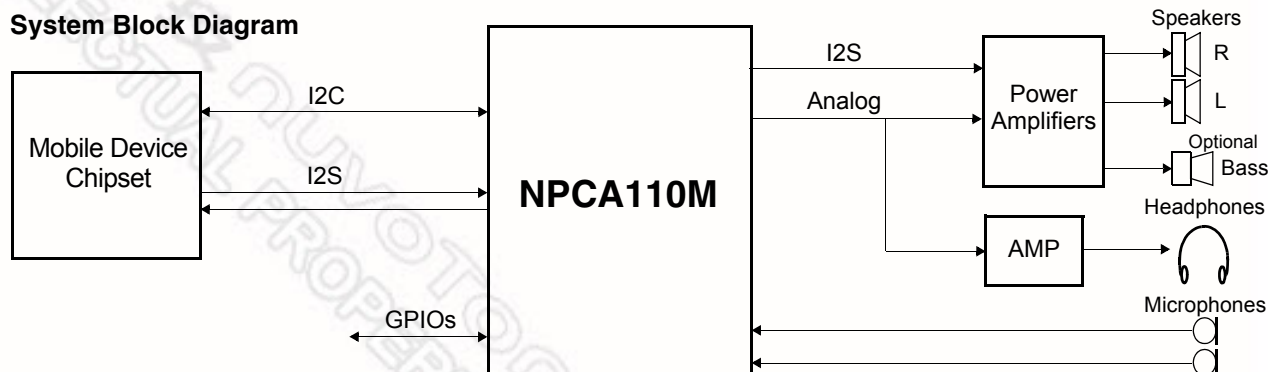

## Features

### Bus Interfaces

- Synchronous Serial Interface (SSI)
  - Compatible with I2S
  - Master and slave timing support
- I2C Interface
  - Compliant with *I2C-BUS Specification Revision 1.0, 1992*
  - Master or slave interface
  - Supports 7-bit address mode

### Audio Enhancing Engine

- Processing Unit
  - 24-bit accuracy
  - 125 MIPS

### Audio Algorithms

- Sample frequency of 44.1 KHz or 48 KHz
- MaxxBass®
  - Patented Waves MaxxBass psycho-acoustic bass extension delivers a more natural sound than traditional bass boost technologies, which use EQ and can overpower your system. MaxxBass analyzes low frequencies to create harmonics that are perceived as lower, deeper tones.
- Maxx3D
  - Maxx3D extends the span of stereo-side content while maintaining the integrity of unprocessed center content.
  - Maxx3D for Speakers improves the stereo separation of speakers, widening the stereo field for optimal imaging.
  - Maxx3D for Headphones improves stereo perception, restoring the original listening balance to provide more natural sound.
- MaxxTreble
  - MaxxTreble delivers crystal clear high-frequency enhancement for increased RMS without exceeding the system ceiling. Its proprietary algorithm restores luster to over-compressed formats to provide the perfect listening experience.
- MaxxEQ
  - MaxxEQ provides the ability to design EQ curves and shape sound with surgical precision, using up to 10 programmable filters with bell, shelf, low pass, and high pass, plus adjustable frequency, gain, and Q parameters. MaxxEQ's intuitive Graphic User Interface makes click-and-drag filter design fast and easy.

### ■ MaxxVolume®

- MaxxVolume is an all-in-one volume control, with High-Level Compression to increase RMS levels, Low-Level Compression to increase the clarity of soft sounds, Noise Gating to eliminate signal and system noise, and Leveling to smooth out volume levels.

### ■ MaxxLeveler

- MaxxLeveler regulates the perceived volume of the audio, keeping all audio content at the same level.

### ■ MaxxDialog

- MaxxDialog is a revolutionary new technology that enables users to adjust center channel dialog levels without affecting the rest of the audio mix. Based on the Waves Center pro audio plug-in, MaxxDialog delivers clear, crisp dialog that does not disappear behind loud music and sound effects.


### ■ Sub-Woofer

- Enables separating low-frequency content and directing it into a third audio channel, for driving a sub-woofer.

### Straps, Clocks, Supply and Package Information

- Strap Input Controlled Operating Modes
  - PLL reference clock select (REF strap)
  - Test mode select (nTEST strap)
  - I2C master or slave select (I2CMS strap)
  - Boot options
    - ☐ ROM code operation
    - ☐ Loadable algorithms for new functions or ROM code patching
- Input Clocks
  - SSI / I2S clock: 64x of sample frequency
  - Optional Crystal oscillator or input clock
- Power Supply
  - 3.3V (I/O, Analog) and 1.8V (Core) operation
- Power-Save Modes
  - Clock switch to a lower frequency
  - WAIT instruction (clock stopped)
  - PLL power-down
- Package
  - 6 x 6 mm, 40-pin Quad Flat No-Lead (QFN) package

### Algorithm Processing Chain

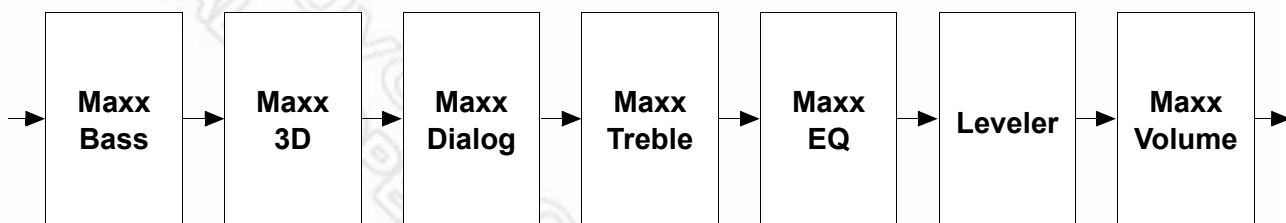

## Features (Continued)


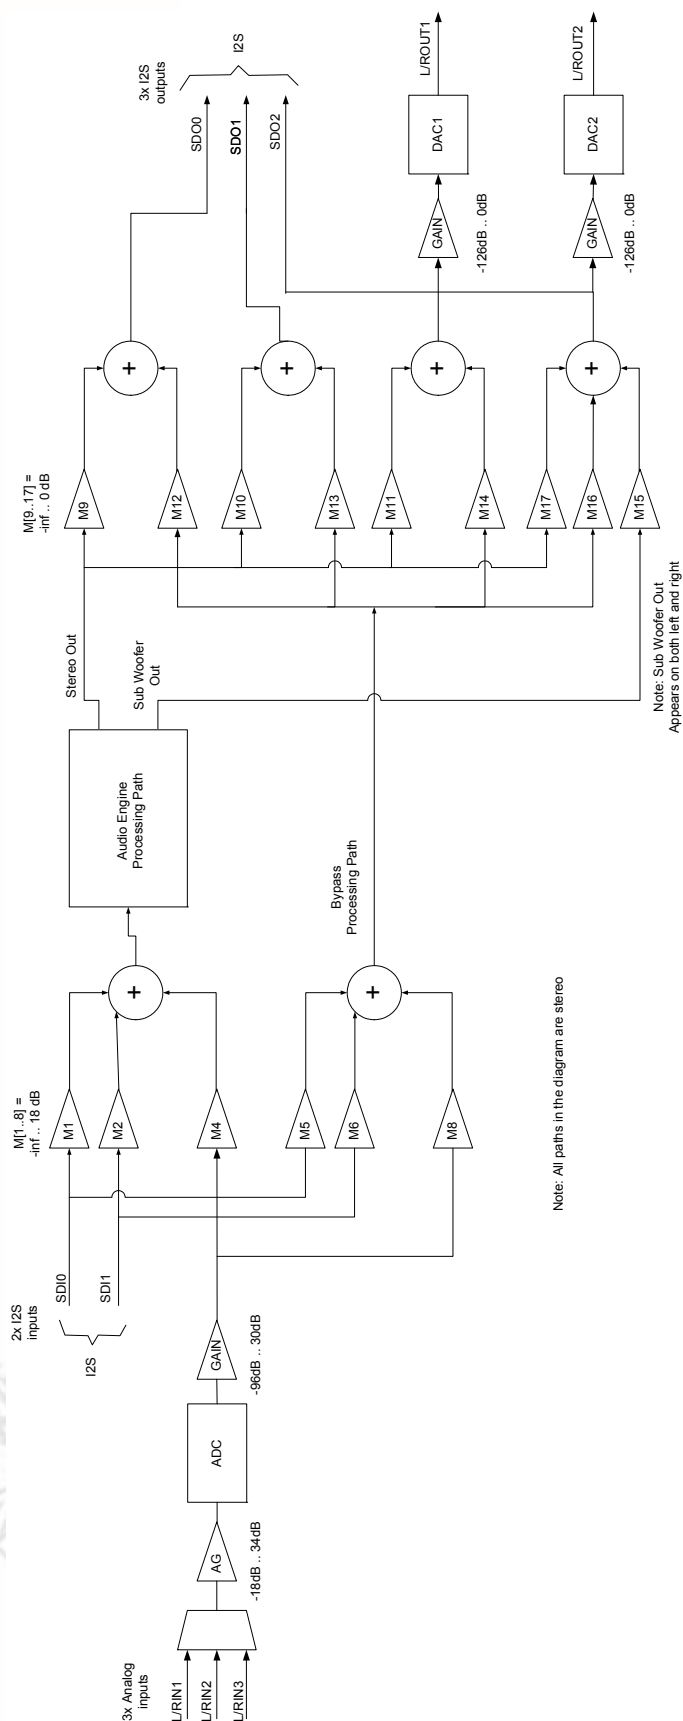


Figure 1. Device Block Diagram

## Physical Dimensions

Control dimensions are in millimeters.

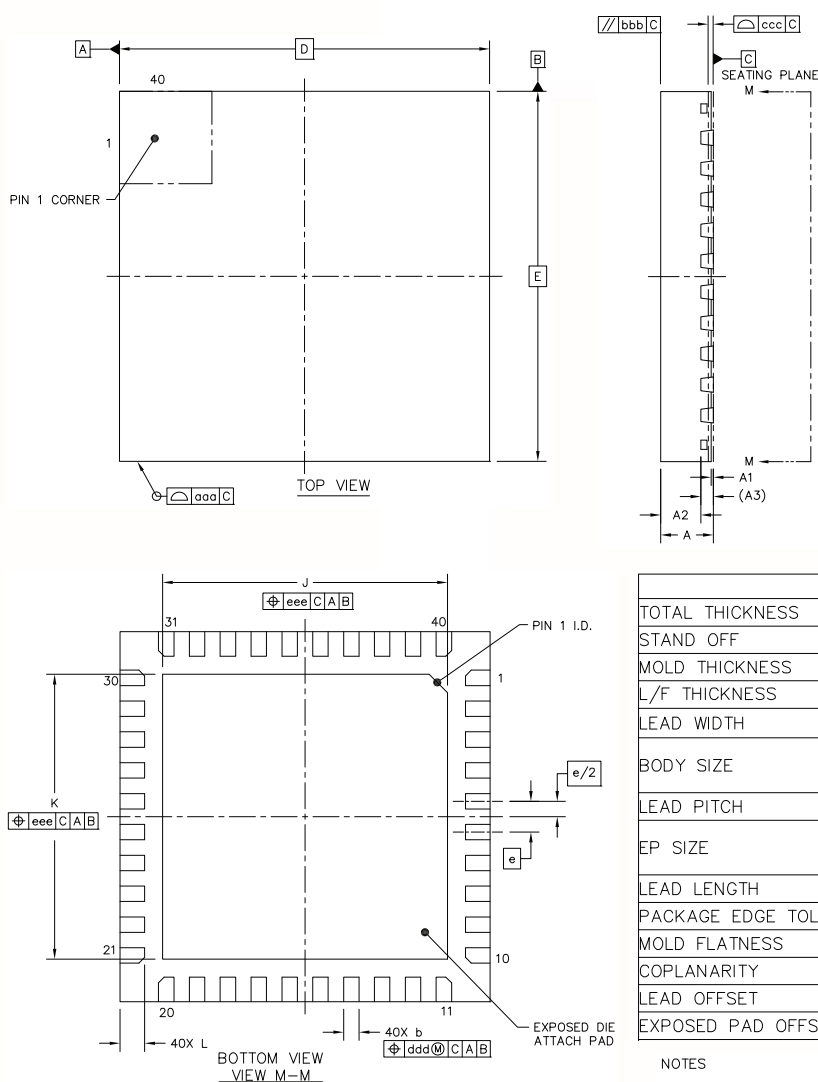

		SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS		A	0.8	0.85	0.9
STAND OFF		A1	0	0.035	0.05
MOLD THICKNESS		A2	---	0.65	0.67
L/F THICKNESS		A3	0.203 REF		
LEAD WIDTH		b	0.2	0.25	0.3
BODY SIZE	X	D	6 BSC		
	Y	E	6 BSC		
LEAD PITCH		e	0.5 BSC		
EP SIZE	X	J	4.52	4.62	4.72
	Y	K	4.52	4.62	4.72
LEAD LENGTH		L	0.35	0.4	0.45
PACKAGE EDGE TOLERANCE		aaa	0.1		
MOLD FLATNESS		bbb	0.1		
COPLANARITY		ccc	0.08		
LEAD OFFSET		ddd	0.1		
EXPOSED PAD OFFSET		eee	0.1		

### NOTES

1.0 COPLANARITY APPLIES TO LEADS, CORNER LEADS AND DIE ATTACH PAD.

## 40-Pin Quad Flat No-Lead (QFN) Package Order Number: NPCA110MA0YX

### Device topside mark specification:

1st Line: Nuvoton Company Logo.

2nd Line: Part number - NPCA110MA

3rd Line: 0YXYWWZZZ.

'Y': QFN package indicator; 'X': Green package finish indicator.  
YWWZZZ, where YWW is the Date Code and ZZZ is Nuvoton proprietary information.

4th Line: Nuvoton proprietary information - six to nine characters.

Date code: YWW, where Y is the year and WW is the week. For example, date code 035 indicates that device assembly was done on week 35, year 2010.

**nuvoTon**

NPCA110MA

0YXYWWZZZ

ZZZZZZ-ZZ

新唐科技 NUVOTON  
INTELLECTUAL PROPERTY

#### Important Notice

Nuvoton products are not designed, intended, authorized or warranted for use as components in systems or equipment intended for surgical implantation, atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, or for other applications intended to support or sustain life. Furthermore, Nuvoton products are not intended for applications wherein failure of Nuvoton products could result or lead to a situation wherein personal injury, death or severe property or environmental damage could occur.

Nuvoton customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Nuvoton for any damages resulting from such improper use or sales.

#### Headquarters

No. 4, Creation Rd. 3,  
Science-Based Industrial Park,  
Hsinchu, Taiwan, R.O.C  
TEL: 886-3-5770066  
FAX: 886-3-5665577  
<http://www.nuvoton.com.tw> (Chinese)  
<http://www.nuvoton.com> (English)

#### Nuvoton Technology Corporation America

2727 North First Street,  
San Jose, CA 95134, U.S.A.  
TEL: 1-408-544-1718  
FAX: 1-408-544-1787

#### Nuvoton Technology (Shanghai) Ltd.

27F, 2299 Yan An W. Rd.  
Shanghai, 200336 China  
TEL: 86-21-62365999  
FAX: 86-21-62365998

#### Taipei Office

9F, No.480, Rueiguang Rd.,  
Neihu District, Taipei, 114,  
Taiwan, R.O.C.  
TEL: 886-2-2658-8066  
FAX: 886-2-8751-3579

#### Winbond Electronics Corporation Japan

NO. 2 Ueno-Bldg., 7-18, 3-chome  
Shinyokohama Kohoku-ku,  
Yokohama, 222-0033  
TEL: 81-45-4781881  
FAX: 81-45-4781800

#### Nuvoton Technology (H.K.) Ltd.

Unit 9-15, 22F, Millennium City 2,  
378 Kwun Tong Rd.,  
Kowloon, Hong Kong  
TEL: 852-27513100  
FAX: 852-27552064

For Advanced PC Product Line information contact: [APC.Support@nuvoton.com](mailto:APC.Support@nuvoton.com)

Please note that all data and specifications are subject to change without notice.

All trademarks of products and companies mentioned in this document belong to their respective owners.

[www.nuvoton.com](http://www.nuvoton.com)